

Box rotator

- Maximum box width: 1800 mm
- 180° rotation angle (left rotation as standard)
- Open construction for optimal visibility on the forklift forks
- Plug-in or folding third fork with gas spring
- Third fork in width adjustable
- High quality tipping shaft with sleeve bearing
- Including hoses and quick connectors
- Excluding forklift forks

Equipped with durable and replaceable sprocket and gear rack (width 50 mm)

[Find dealer](#)


Type	Maximum load	Height of the fork carrier	Frontal extension length	Center of gravity	Height third fork*	Fork carrier width	Weight	Price
K54A-I *	2500 kg	FEM2: 407 mm	165 mm	133 mm	360 mm	1000 mm	240 kg	€ 3350,-
K54A-O *	2500 kg	FEM2: 407 mm	165 mm	158 mm	660 mm	1000 mm	270 kg	€ 3700,-
K54C-I *	3500 kg	FEM3: 508 mm	185 mm	134 mm	460 mm	1200 mm	315 kg	€ 3975,-
K54C-O *	3500 kg	FEM3: 508 mm	185 mm	158 mm	760 mm	1200 mm	345 kg	€ 4325,-

* I = plugin model, O = foldaway model

* Calculated from the top of the fork to the bottom of the fork carrier

Options

- Rotation angle up to 200° I/O 180° € 200,-
- Right rotated instead of left rotated € 250,-
- Topfork (detachable) € 450,-
- Hydraulic connection on fork carrier (rotating, not possible in combination with 200° rotation angle) € 325,-
- Hydraulic connection (not rotating) € 225,-
- Rapid coupling € 325,-
- Adjustable ball bearing instead of sleeve bearing € 950,-
- Attachment to frontloader or reachtruck

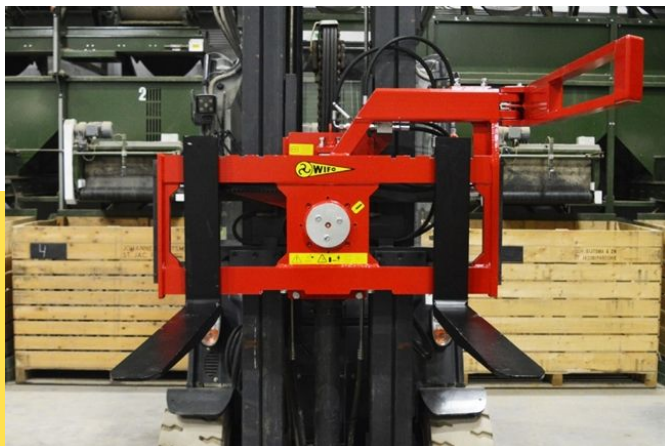

Kistenkantelaar K54C-O



Kistenkantelaar K54C-I