

Loading bucket (fork carriage mounted)

- Suitable for products vulnerable to damage
- Frame with rapid coupling FEM2 and FEM3 directly onto fork carriage
- See-through grille for optimal visibility
- 6 mm plate thickness
- Equipped with manganese wearing strip (80x15 mm)
- Including hydraulic hoses and quick connectors


Type	Shovel width	Shovel depth	Shovel height	Volume	Center of gravity	Weight	Price	Additional charge stainless steel bottom plate
HOD-150F	1500 mm	1550 mm	850 mm	1100 l	800 mm	400 kg	€ 3750,-	€ 500,-
HOD-175F	1750 mm	1550 mm	850 mm	1300 l	800 mm	435 kg	€ 3850,-	€ 550,-
HOD-200F	2000 mm	1550 mm	850 mm	1500 l	800 mm	470 kg	€ 3950,-	€ 600,-
HOD-225F	2250 mm	1550 mm	850 mm	1700 l	800 mm	505 kg	€ 4050,-	€ 650,-

Options

- Transparent cover-plate mounted on see-through grille (for grain etc.) € 75,-
- Detachable frame (+20% content; not for products vulnerable to damage) € 650,-
- Straight edges (not possible in combination with detachable frame) € 200,-
- Bolted plastic wear strip (200x25 mm) € 575,-



WIFO aardappelschapbak op vorkenbord

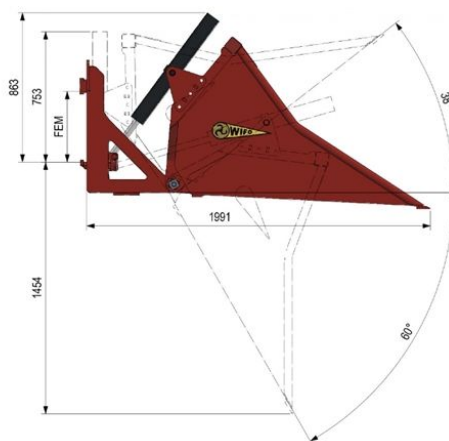

WIFO aardappelschapbak op vorkenbord